


## GFQ-3Z-5158 Splitter

GFQ-3Z-5158 is used in the indoor coverage system for 5.8GHz spread spectrum communication. It features good plainness, high separation, little input loss and good VSWR.

### Specification

Category	3 Way Splitter
Model	GFQ-3Z-5158
Frequency Range -MHz	4900-5850
Insertion Loss - dB (Including Dividing Loss)	$\leq 5.4$
Isolation -dB	$\geq 20$
Nominal Impedance - $\Omega$	50
VSWR	$\leq 1.4$
Max Power -W	50
Connector	N Female
Temperature Range - $^{\circ}\text{C}$	-30~+60
Relative Humidity -%	5~95
Dimension -mm	72 $\times$ 60 $\times$ 20
Weight -g	150

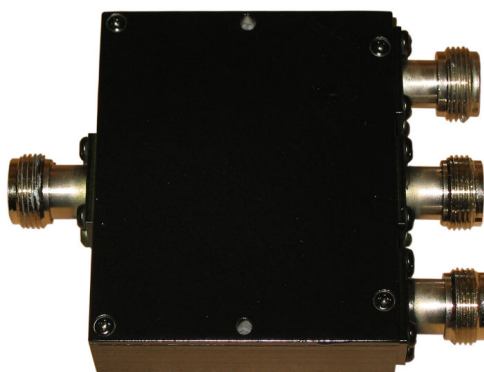

### **KENBOTONG COMMUNICATION LTD.**

**Add: Kenbotong Technology Park, No2. Chanxiu Road, Foshan, Guangdong, China 528061**

**Tel: 86-757-82218028 82219788 82126633 Fax: 86-757-82212072**

**E-mail:kbt@kenbotong.com**

**<http://www.kenbotong.com>**