


# GFQ-E-2060 Power Splitter Series

Adopted by stripline structure, GFQ-2E-2060, GFQ-3E-2060 power splitters feature low passband ripple, low insertion loss and low VSWR. It is easy to mount and suitable for the indoor coverage system of cellular mobile communications and WLAN.

Specifications		
Category	Power Splitter	
Model	GFQ-2E-2060	GFQ-3E-2060
Frequency Range-GHz	2 to 6	
Insertion Loss-dB	≤3.5	≤5.5
VSWR	≤1.4	
Nominal Impedance -Ω	50	
Power Capacity -W	50	
Connector	N Female	
Dimensions-mm(excluding the connector)	101×70×17	139×70×17
Weight-g	165	210
Temperature Range -°C	-30 to +60	
Relative Humidity -%	5 to 95	

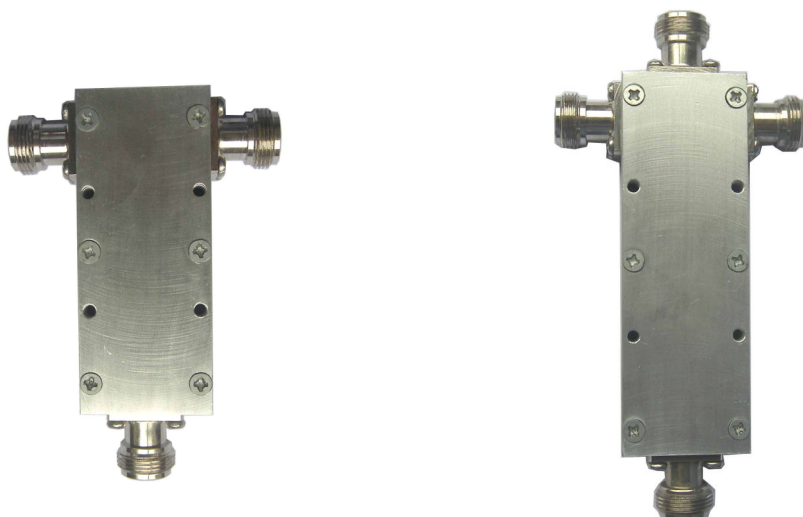

## KENBOTONG COMMUNICATION LTD.

Add: Kenbotong Technology Park, No2. Chanxiu Road, Foshan, Guangdong, China 528061

Tel: 86-757-82218028 82219788 82126633

Fax: 86-757-82212072

E-mail: kbt@kenbotong.com

<http://www.kenbotong.com>